




CE EN 14439
(C/25)

R (m)												
80	29,5	35	40	45	52,7	55,9	60	64	70	74	80	m
	12000	9825	8390	7285	6000	6000	5550	5160	4660	4375	4000	kg
74	29,4	35	40	45	52,7	56,2	60	64	70	74		m
	12000	9820	8385	7280	6000	6000	5580	5190	4690	4400		kg
70		36,6	40	45	50	54	60	65,6	70			m
		12000	10830	9445	8345	7610	6700	6000	6000			kg
64		36,3	40	45	50	54	60	64				m
		12000	10720	9350	8255	7530	6630	6200				kg
60			44,0	45	50	54	60					m
			12000	11700	10375	9490	8500					kg
50				43,9	45	50						m
				12000	11670	10500						kg
40					40							m
					12000							kg



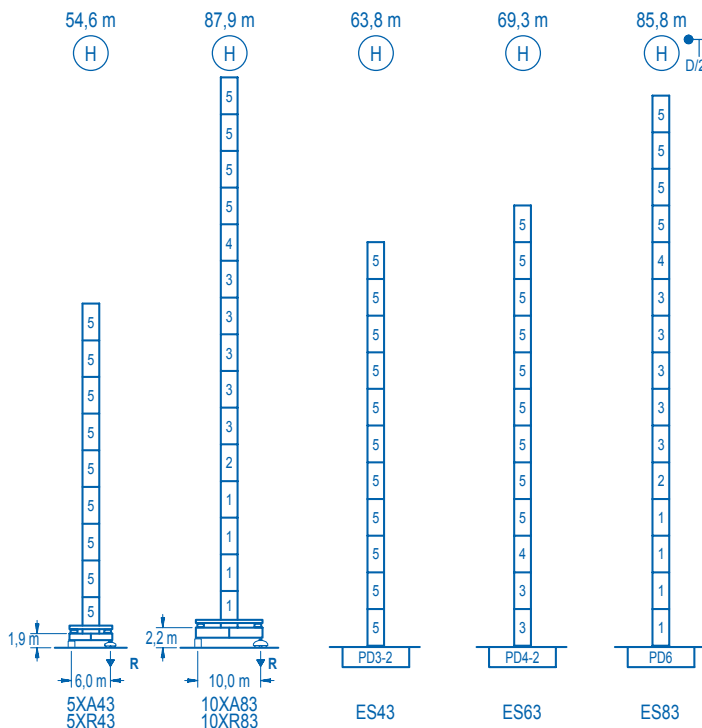

nº	Ref.	□	h
1	D36	2,5	5,5
2	TD36A	2,5	5,5
3	D34	2,5	5,5
4	TD34	2,5	5,5
5	D33	2,5	5,5
6	CLD36	2,5	3,8

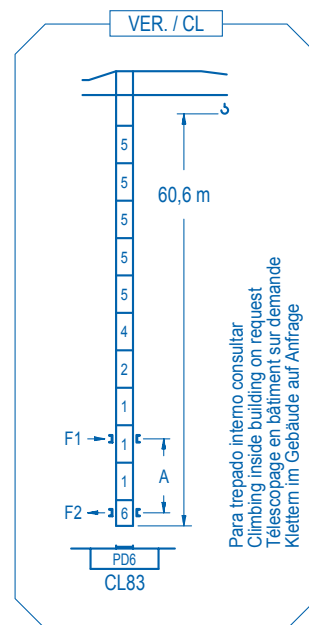

R. máx.	En servicio In operation En service In Betrieb	5XR43..... 128,0 t 10XR83..... 123,6 t

R. máx.	Fuera de servicio Out of service Hors service Ausser Betrieb	5XR43..... 91,4 t 10XR83..... 192,5 t

Para otras zonas de viento o alturas superiores consultar
For other wind zones or additional hook heights on request
Pour d'autres zones de vent ou des hauteurs supplémentaires sur demande
Für andere Windzonen oder weiteren Hakenhöhen auf Anfrage

	5XA43	10XA83
A max	40,4	73,7
B max	-	33,0
C max	52,7	47,2
H max	93,1	120,6




	ES43	ES63	ES83
A max	49,6	55,1	71,6
B max	-	33,0	-
C max	47,2	47,2	47,2
H max	96,8	129,8	102,3

	CFU-7.5
	7,5 kW
0 ⇄ 94 m/min	

	GR-12
	4 x 120 Nm
0 ⇄ 0,7 rpm	

	TRA-7.5	TRA-10
	2 x 75 Nm	2 x 100 Nm
0 ⇄ 20 m/min		
	5XR43	10XR83

	TRA-7.5VC	TRA-10VC
	2 x 75 Nm	2 x 100 Nm
0 ⇄ 20 m/min		
	5XR43	10XR83

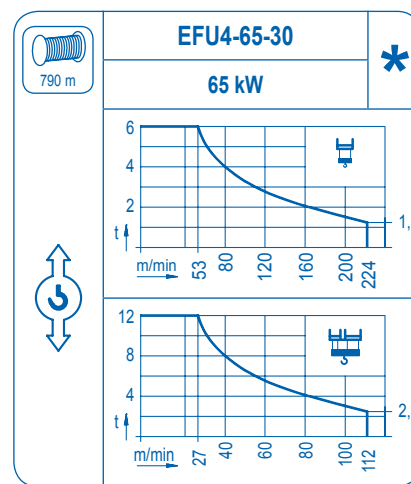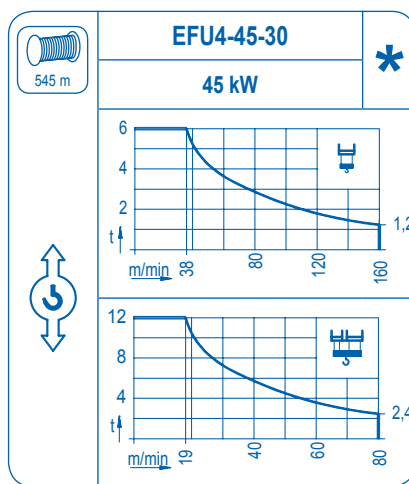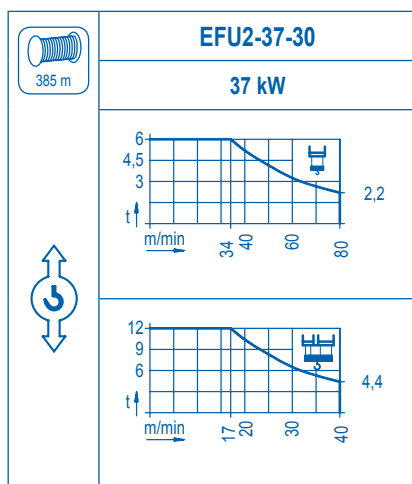

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	400 V 3 ph 50 Hz
--	---

Opcional Optional En option Kaufoption	*
---	----------



Tel.: (34) 948 335 020
Fax: (34) 948 330 810
e-mail: info@comansa.com
www.comansa.com

Polígono Urbizkain
E-31620 HUARTE-PAMPLONA.- SPAIN